

## SONIC VELOCITY VARIABLE DENSITY CALIPER

Job No. 13980  
 Company UNAVCO  
 Well B918  
 Field MOJAVE  
 County KERN State CA

Location:  
 CHINA LAKE:  
 MOUNTAIN SPRINGS CANYON RD  
 Sec. Twp. Rge. Other Services:  
 ELOG/CALIPER  
 BHTV

Permanent Datum	G.L.	Elevation above perm. datum	Elevation
Log Measured From	TOP OF CSG 1		K.B. D.F. G.L.
Drilling Measured From	TOC		
Date	06-16-08		
Run Number	ONE		
Depth Driller	710'		
Depth Logger	710'		
Bottom Logged Interval	710'		
Top Log Interval	397'		
Casing Driller	6 5/8" @ 397'		
Casing Logger	397'		
Bit Size	6"		
Type Fluid in Hole	WATER		
Density / Viscosity	N/A		
pH / Fluid Loss	N/A		
Source of Sample	TRUCK		
Rm @ Meas. Temp	17.6 @ 77F		
Rmf @ Meas. Temp	17.6 @ 77F		
Rmc @ Meas. Temp	N/A		
Source of Rmf / Rmc	MEAS		
Rm @ BHT	N/A		
Time Circulation Stopped	-		
Time Logger on Bottom	17:00		
Max. Recorded Temperature	N/A		
Equipment Number	PS-1		
Location	L.A.		
Recorded By	RIDDER		
Witnessed By	S. ALM		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



### Comments


Database File: 13980.db  
 Dataset Pathname: Unavco/well/run1/sonic.1  
 Presentation Format: SLT  
 Dataset Creation: Tue Jun 17 19:04:59 2008 by Calc Warrior Version 6.6  
 Charted by: Depth in Feet scaled 1:240

240	DT (usec/ft)	40	ITT (msec)	200	Variable Density 5 ft	1600	200	Variable Density 5 ft	1600
5	CALIPER (in)	15		0	Single Point (Ohm-m)	2000			

5	Bit Size (in)	15
10	Gamma-Ray (GAPI)	80

Single Point (GAPI) 2000

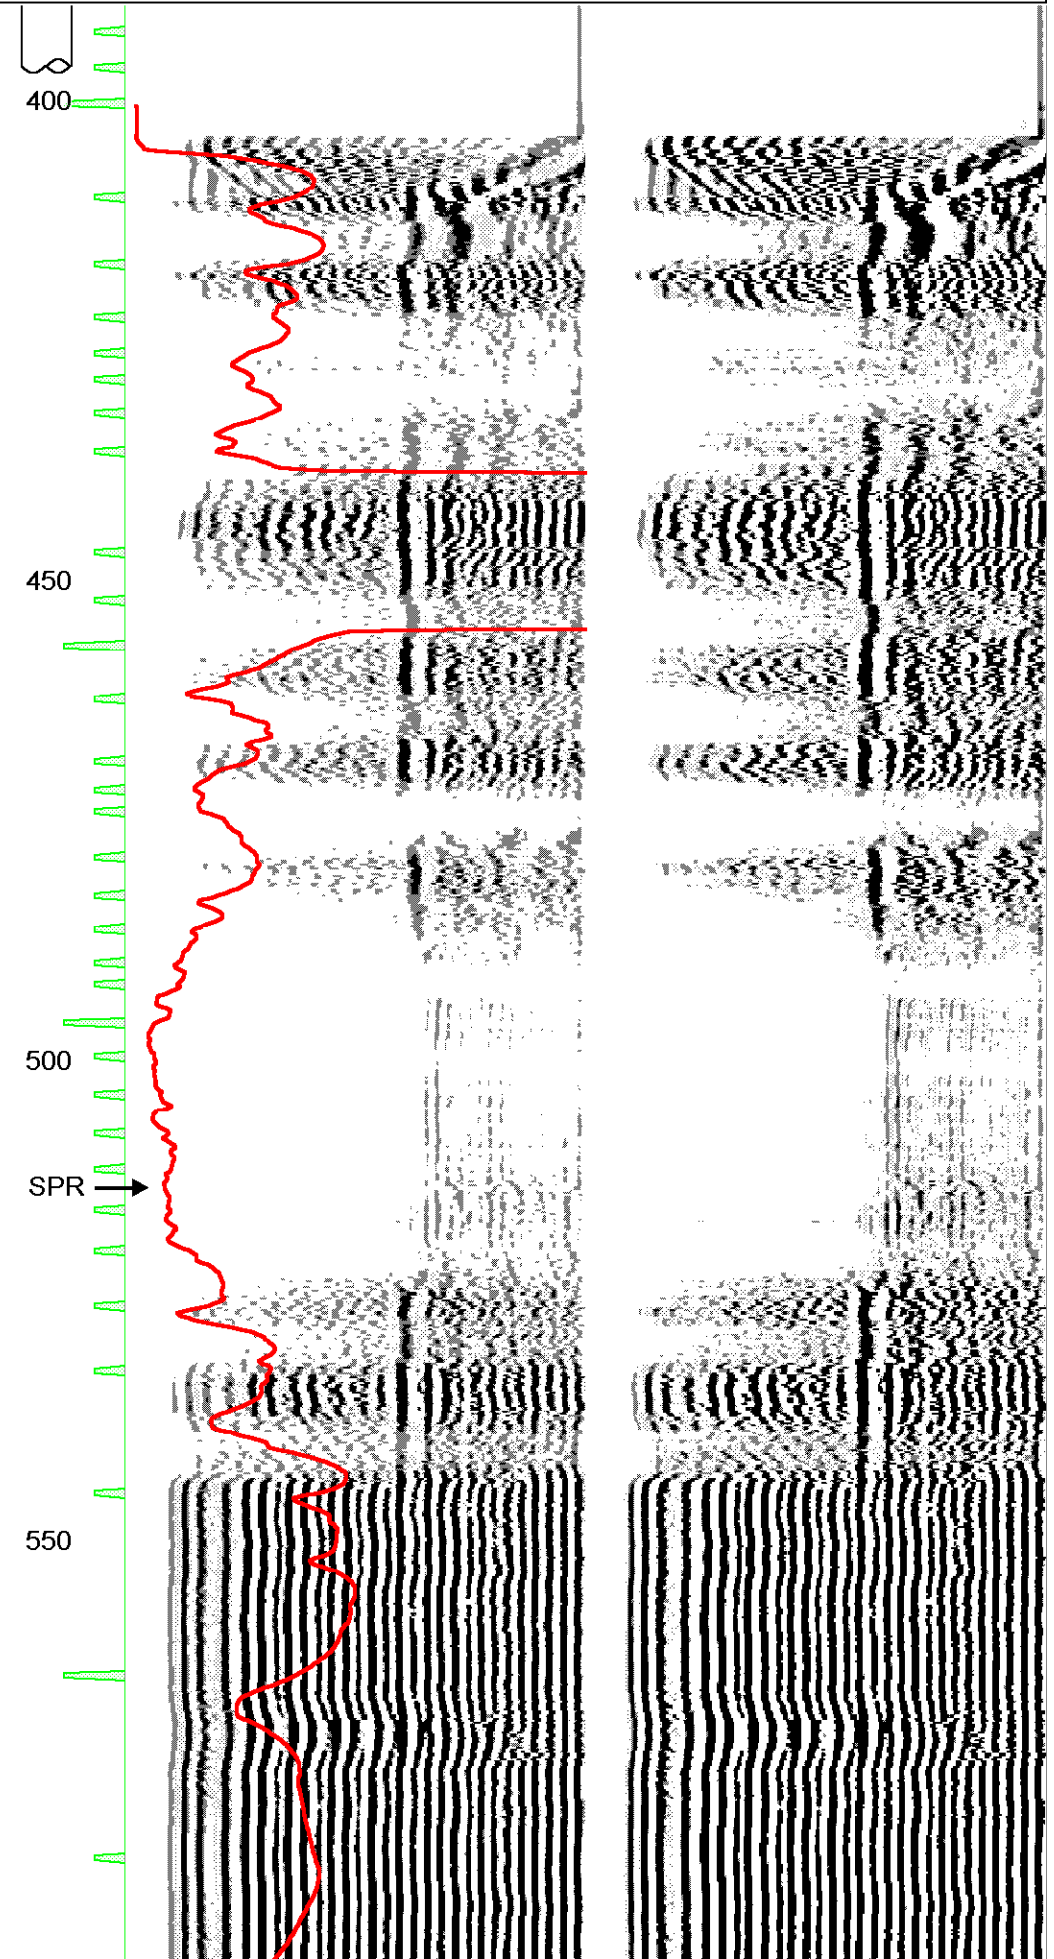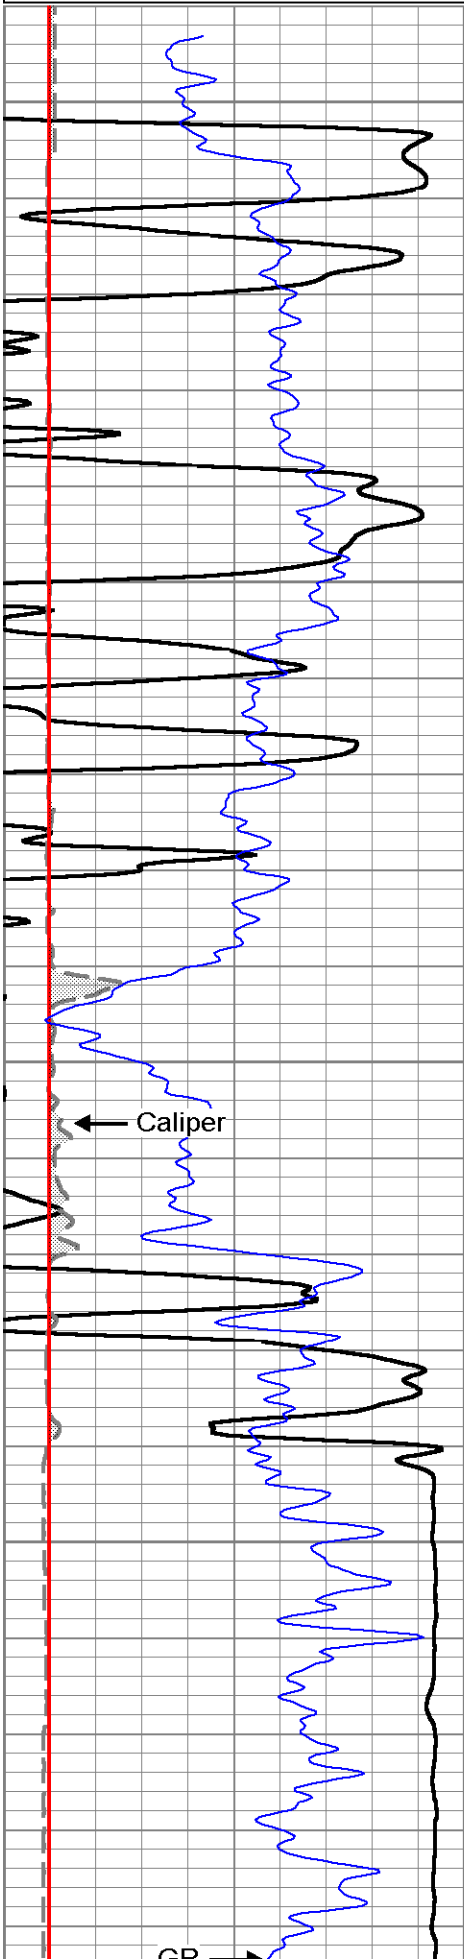

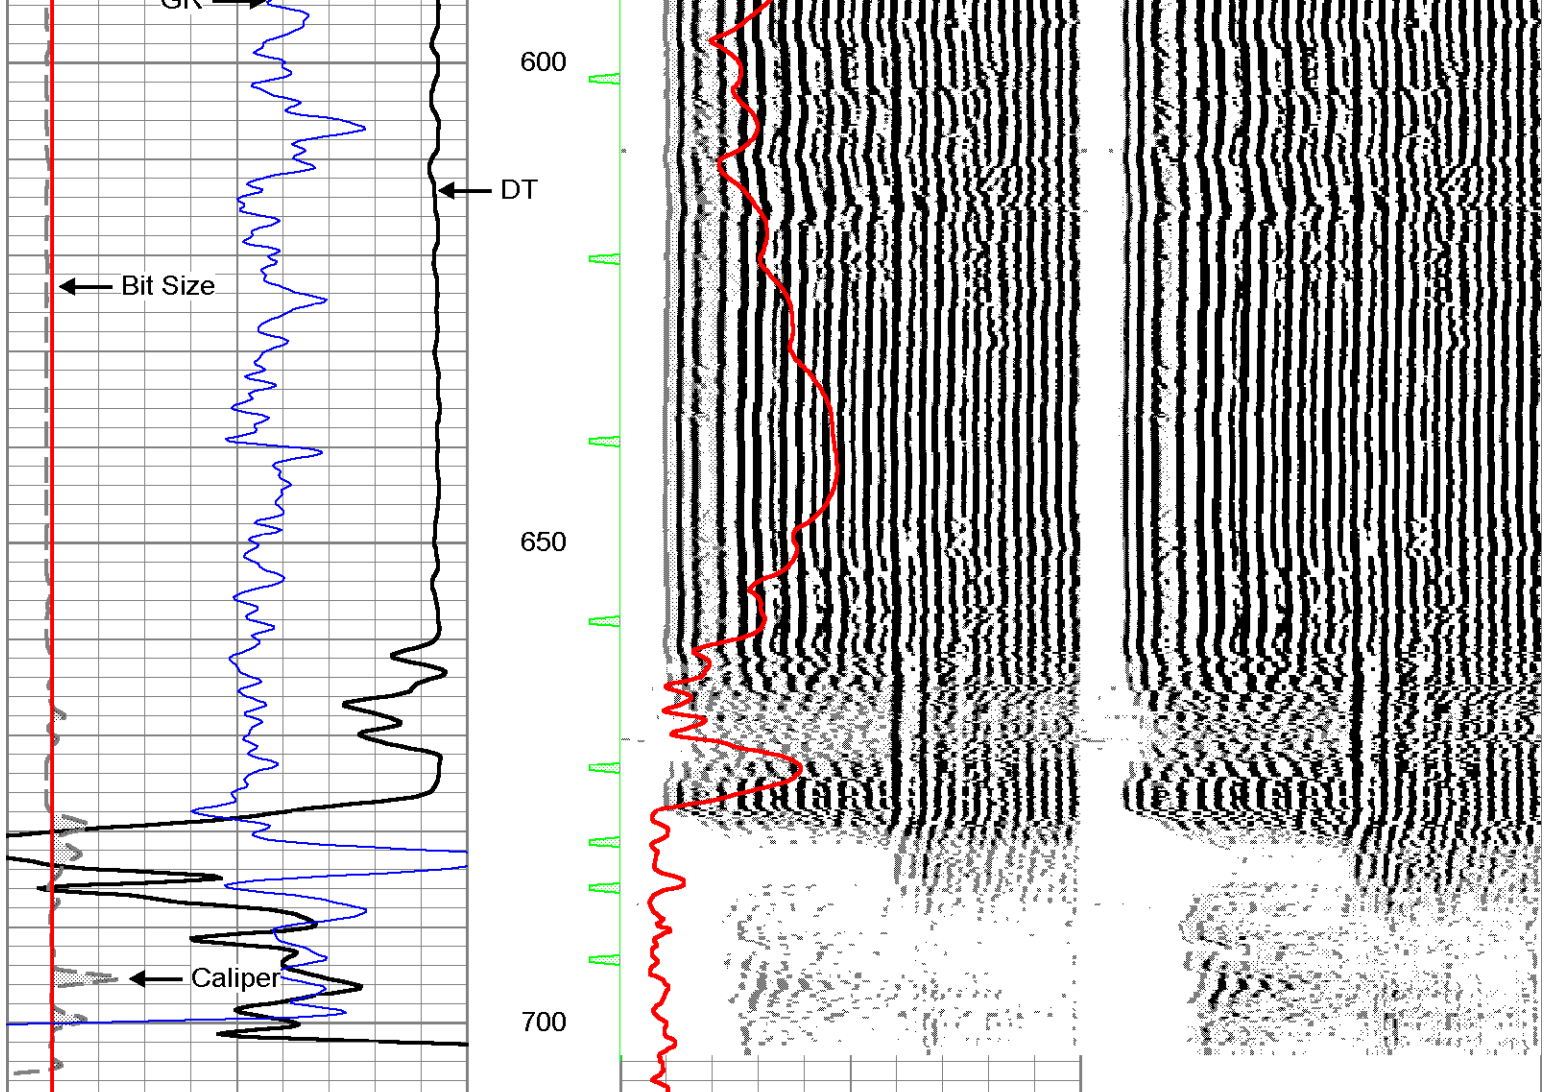

240	DT (usec/ft)	40	ITT (msec)	200	Variable Density 5 ft	1600	200	Variable Density 5 ft	1600
5	CALIPER (in)	15		0	Single Point (Ohm-m)	2000			
5	Bit Size (in)	15							
10	Gamma-Ray (GAPI)	80							